



# User manual




## Product introduction

- Desktop 5 Table Socket provides an orderly,simply and compact tabletop connection solution.It can convert the AC 100-240V 50-60HZ to 20V 1.5A to charge your mobile devices.
- This recessed outlet has 1 X AC power outlet & 1 X USB A+C charge & 3.28ft Power Cord & 2 x Cable Holes for your diverse power needs.

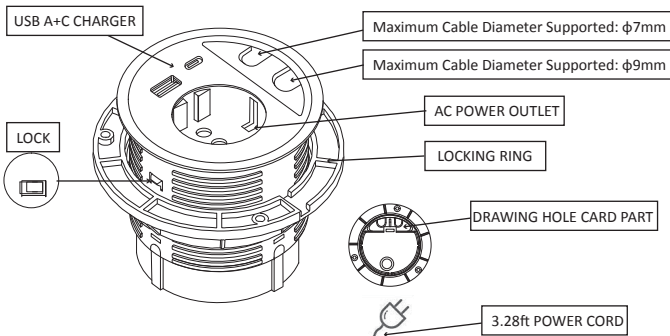

## Product features

- Easy access to connectors
- Installed and use immediately
- Install cutout diameter:80mm/3.15inch
- Color option:black/white
- EU, DK, UK, power are available

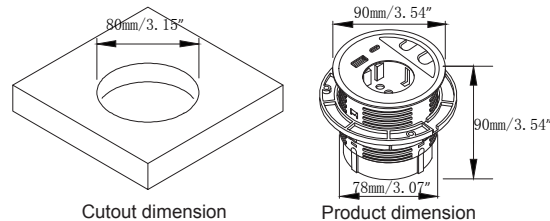

Cutout dimension

Product dimension


Product name	USB desktop power grommet
Model number	Desktop 5
Type	Tabletop socket
Material	ABS fireproofing plastic
Color	White/Black
Interface	USB-C output: 5V/3A,9V/3A,12V/3A,15V/3A,20V/3.25A (65W Max) USB-A output: 5V/3A,9V/2A,12V/1.5A (18W Max) USB-A+USB-C output: 18W+45W(63W Max) USB-C: 5V/3A,9V/3A,12V/2.5A,15V/3A,20V/2.25A USB-A: 5V/3A,9V/2A,12V/1.5A (USB-A port will be restored fast charging when Type-C output ≥ 9V)
Power Cord	1m/3.28ft
Working temperature	0 ~ 50 °C (no condensation)
Grounding	Standard Grounding
Rated Voltage / Current	100-240V/16A 50-60HZ
Panel Size	Dia 90mm/3.54inch
Cutout Size	Dia 80mm/3.15inch
Net Weight	0.38kg/0.84lb
Table Thickness	maximum 40mm/1.57inch
Certificate	CE/RoHS/CCC
Applications	office/conference room/lecture hall/hotels/hospital

## Cautions


- Keep the product away from the reach of children.
- Please read this manual carefully before your using.
- Unauthorized personnel shall not open the unit as there are high-voltage components inside;Qualified personnel must perform all devices.
- The maximum power of power supply is 3500W.
- Keep dry, ventilated and keep away from humid, dust, and heat.
- Check carefully the power voltage and frequency before installation.
- Disconnect the power cord to turn off the power before cleaning the unit.
- Clean with a dry cloth. Do not use any depurative for cleaning.

## Installation

- 1、Cut a diameter 80mm/3.15inch hole into the table's surface under the size and shape shown on the hole figure.




- 2、Press the bottom of cable cubby plate and put the required cable in the cable holes. Press again the top of cable cubby plate to lock the cable and plate.



- 3、Insert the unit into table cutout and adjust the position.


- 4、Put the rubber ring on the locking ring, and screw the locking ring to 25mm/0.98inch or 18mm/0.71inch thickness locking it automatically.



- 5、If table thickness not standard 18mm/0.71inch or 25mm/0.98inch, use M3\*10 screws to fix under the table.



- 6、If table thickness>40mm/1.57inch,make concave surface at the bottom of table.



- 7、When disassemble this product, engage the lower end of the ring with a flat blade screwdriver and screw the ring in reverse.

